


# ANTICO™ TRAVERTINE

Technical Data Sheet A.4

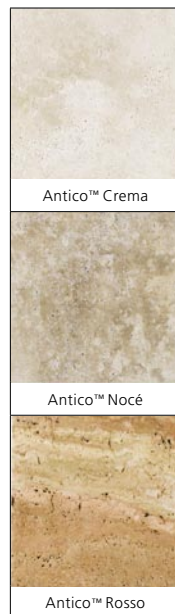

Antico™ Travertine is quarried in the Aegean region of Turkey. It is quarried in blocks, cut down to tile sizes and then "aged" through a special process involving abrasive brushing of the stone. The end effect is a tile that looks as if it were laid half a century ago. The stone takes 6-8 weeks to dry to final colour.

**Antico™ Crema** is a light to medium cream tile. The ratio of homogeneity is 70%. **Antico™ Turkey, Patinato** and **French Pattern** offer a light to medium-dark beige tile with a possibility of brownish to black veining. The ratio of homogeneity is 50%. With the Antico™ Turkey the edges of the tile have been hammered to further accentuate the aged effect, while the Patinato has straight edges for a more minimalist finish. The Antico™ French Pattern also has hammered edges and, for an even more authentic look, the tiles are supplied in a ratio of four different sizes and laid in one pattern.

# ANTICO™ TRAVERTINE

Technical Data Sheet A.4

## SIZES

Antico™ Crema	Antico™ Turkey and Patinato	Antico™ French Pattern
300 x 300 x 10 mm	280 x 280 x 10 mm	610 x 305 x 15 mm
400 x 404 x 10 mm	305 x 305 x 10 mm	203 x 203 x 12 mm
457 x 457 x 10 mm	305 x 305 x 12 mm	610 x 406 x 15 mm
	406 x 406 x 12 mm	203 x 406 x 12 mm
	457 x 457 x 12 mm	406 x 406 x 12 mm
		610 x 508 x 15 mm
		610 x 406 x 12 mm
		610 x 610 x 15 mm

## RECOMMENDED APPLICATIONS

This product is best suited for interior and exterior use on floors and walls. It can be used virtually anywhere in the house from kitchen or bathroom to lounge and dining room. The product can also be used externally for walls. When used in interiors the holes eventually fill with residues over time giving the effect of a more rustic floor. The more traffic the better the stone will look.

## LAYING RECOMMENDATION

- A 5mm joint between tiles
- The use of white tile adhesive
- MCC Travertine grout
- Existing expansion joints should be respected and not tiled over
- Use expansion joints as prescribed by architect or specialized tiler
- Tiles should be laid on a level and even screed which should have been cured for about one week prior to tiling

## PRODUCT CARE & MAINTENANCE

All natural stone should be sealed to prevent staining. We recommend the use of Delta Research Seal or Saf Seal as an anti-stain treatment. Wet Seal can be used if colour enhancement is desired. The product must be applied by professionals or under strict instruction as indicated by Delta Research. For everyday maintenance we recommend Delta Research Clean Stone or a neutral pH detergent. Do not use acid or alkaline detergents as repeated applications will damage the sealer, leaving the stone unprotected. Externally and on wall cladding Antico™ Travertine can be cleaned with a high pressure cleaner.



www.naturalstonewarehouse.com